



- Multi-function digital watch with 12 or 24 animation dots

CHARACTERISTICS

- 1. Analogue & digital time displays: Hour, Minute, Second, Month, Date and day of the week.
- 2. Automatic calendar: The calendar automatically adjusts the dates and months from the year of 2000 to 2049.
- 3. Daily alarm and hourly chime: The alarm can be set to sound at the designated time on a 24-hour basis and the chime can be set to sound every hour on the hour with a single beep.
- Time in a different time 4. Second time zone:
- zone can be displayed.5. Countdown timer: The countdown timer can be set up to 23 hours 59 minutes and 59 seconds.
- 6. Stopwatch: The stopwatch can measure up to 23 hours 59 minutes and 59 seconds in 1/100-second increments. Split time measurement is available.
- 7. Selection of 12 or 24-hour format: The time display format in either 12-hour indication or 24-hour indication can be selected.
- 8. Animation dots are displayed: Animation dots are displayed in both 12 and 24-hour for-mat and can be selected in either fast flashing or slow flashing.
- 9. EL backlight: The built-in electro-luminescent (EL) backlight illuminates the display for easy viewing in darkness.




Animation dots are displayed in both 12 and 24-hour format



SETTING THE TIME (ANALOGUE)

- Pull the crown out one step, the second hand 1. will stop.
- 2 Set the correct time by turning the crown. Push the crown back to the original position. 3.
- The watch will start running again
- The analogue indication and digital display of the time setting can be adjusted separately.



Selection of 12-hour/24-hour format

The time display format in either 12-hour indi-cation or in 24-hour indication can be selected by pressing S2 button. Under the 12-hour indi-cation format, no mark appears on the display. Under the 24-hour indication format, "-" mark Under the 24-hour indication format, appears under the date indicator.

LORUS


The calendar automatically adjusts the dates and months from the year of 2000 up to 2049.



24-hour format indication

■HOW TO CHANGE THE DISPLAY MODE

- Press S3 button to show the NORMAL TIME mode
- If the NORMAL TIME mode is shown already on the display, skip the above operation. Press S3 button to change the display mode in
- the following order.

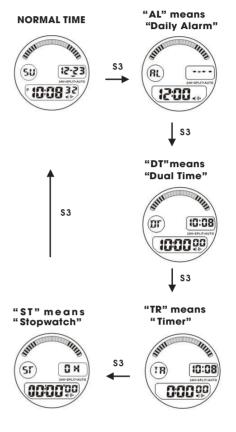

HOW TO SET ALARM TIME

- 1. From NORMAL TIME mode, press S3 button once into ALARM mode.
- 2. Press S4 button to begin setting procedure.
- The hours digit starts flashing. Press S1 button to set HOURS setting. 3.
- Press S3 button to move on to MINUTES setting. 4.
- Selection of the digits to be adjusted is made in the following order by pressing \$3 button and then pressing \$1 button.

SILL

• - - -

S4

SILI

S3


SILIE

Press S3 button after completing the setting.


S3 **1** S3

■ HOW TO SET NORMAL TIME/ CALENDAR

- 1. Press S3 button to show the NORMAL TIME mode
- 2. Press S4 button to begin setting procedure. The seconds digit starts flashing.
- Press S1 button to set SECONDS setting 3.
- Press S3 button to move on to HOURS setting. 4. Selection of the digits to be adjusted is made in the following order by pressing S3 button
- and then pressing \$1 button. 5. Press S3 button after completing the setting.



Day of week will change automatically based on date changing.





12/24-HOUR FORMAT





DATE SETTING BY PRESSING S1





MONTH SETTING BY PRESSING S1



10:08.32

SHIL

12-23

HOURS SETTING BY PRESSING S1






MINUTES SETTING BY PRESSING S1



MIII IIII 12-23 06 10:08 32

S 3

YEAR SETTING BY PRESSING \$1

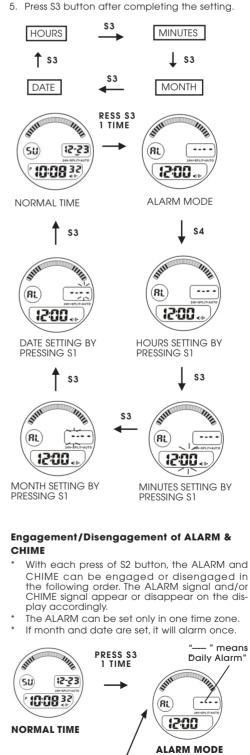

RESET

ŝ

S2

S 3

III

MIL

(RL)

12:00

ALARM/


CHIME ON






HOW TO SET COUNT DOWN TIMER


Countdown Timer Setting




- 1. From NORMAL TIME mode, press S3 button 3 times into TIMER mode.
- Press S4 button to begin setting procedure. 2. The HOURS digit starts flashing.
- Press S1 button to set HOURS setting 3.
- Press S3 button to move on to MINUTES setting. 4. Selection of the digits to be adjusted is made in the following order by pressing \$3 button and then pressing \$1 button.
- 5. Press S3 button after completing the setting.

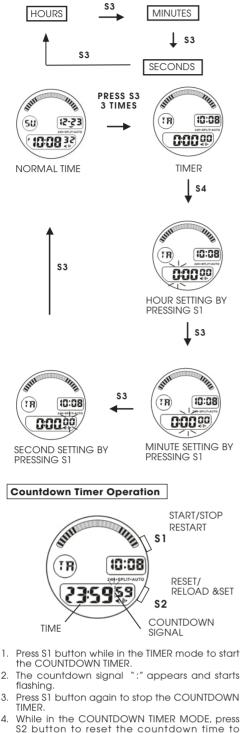


- 2.
- 3. 4.
- S2 button to reset the countdown time to its starting value and to start to countdown automatically or while in countdown time mode press S2 button and then press S1 button to reset the countdown time
- 5. Press S3 button return to NORMAL TIME display.





Lap Time Measurement

- Press S1 to start counting first lap time.
- Press S2 button, the STOPWATCH keeps count-2. ing first lap time and showing it on the display.
- 3. Press S1 button to stop counting first lap time.
- Press S2 button to release first lap time. 4.
- Press S1 button to start counting second lap time. The STOPWATCH shows second lap time. 5.
- This operation can be repeated and the split time can be read.
- Press S2 to finish counting the lap time mearu-6. rement
- 7. Press S2 again to reset the STOPWATCH to "0:00; 00

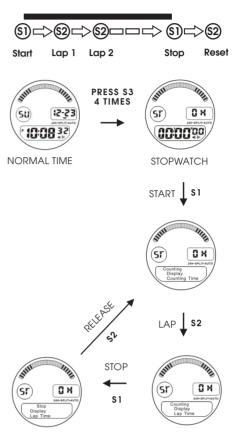

Press S3 button return to NORMAL TIME display.

HOW TO USE EL BACKLIGHT

Press S2 button in any mode to turn the illuminating light on.




Note:

- The backlight of the watch employs an elec-tro-luminescent (EL) light, which tends to lose illuminating power after very long use. The illumination provided by backlight may be hard to see when viewed under direct sunlight.
- When the illuminating light becomes dim, re-place the batteries with new ones.


■ HOW TO SET SECOND TIME ZONE

- 1. From NORMAL TIME mode, Press S3 button 2 times into DUAL TIME mode
- 2 Press S4 button to begin setting procedure. The HOURS digit starts flashing.
- Press S1 button to set HOUR setting 3
- Press S3 button to move on to MINUTE setting. 4.
- Selection of the digits to be adjusted is made in the following order by pressing \$3 button and then pressing \$1 button.
- 5. Press S3 button after completing the setting.



■ HOW TO USE STOPWATCH

From NORMAL TIME mode, Press S3 button 4 times into STOPWATCH mode.



- Press S1 button alternately to start and stop
- Press S2 button to reset the STOPWATCH to "0:00; 00." 2



Stop Start Reset

CARE OF YOUR LORUS WATCH

contains precise electronic This watch components. Never attempt to open the case or remove the back cover.

BATTERY



CAUTION

Do not expose the old battery to fire or recharge it. Keep it at a place be-yond the reach of children. If a child vallows it, consult a doctor immediately.

WATER RESISTANT

Condition of use Indication on the dial/ case back	Accidental contact with water, such as splashes and rain	Swimming and taking a shower	Skin diving	Scuba diving
No Indication	NO	NO	NO	NO
WATER RE- SISTANT	YES	NO	NO	NO
WATER RE- SISTANT (50M/5 BAR)	YES	YES	NO	NO
WATER RE- SISTANT (100M/10 BAR or above	YES	YES	YES	NO

- If your watch is 200 M/20 BAR, 100 M/10 BAR or 50 M/S BAR water resistant, it is so indicated on the dial/case back.
- Do not operate the buttons when the watch is wet
- If the watch is exposed to salt water, rinse it in fresh water and then wipe it thoroughly dry.
- Should you find any water or condensation inside the watch, immediately have it checked. Water can corrode electric parts inside the case

Caution:

Leather straps are not water resistant except so indicated, even if the watch head is water resistant.

ALLERGIC REACTION

Because the case and band touch the skin directly, it is important to clean them regularly. If not, shirt sleeves may be stained and those with delicate skin may develop a rash. Please wear the watch with some play to avoid any possible allergic reaction. If you develop a rash on your wrist, stop wearing and consult a physician.

MAGNETISM

Your watch will be adversely affected by strong magnetism. Keep it away from close contact with magnetic objects.

SHOCKS AND VIBRATIONS

Your watch may be worn for normal sports activities, but be careful not to drop it or hit it on hard surfaces.

TEMPERATURE

Your watch is preadjusted so that constant accuracy may be insured at normal temperature.

CLEANING

Use only a soft cloth and clean water for cleaning your watch. Never use chemicals, as the water proof gasket will corrode.

■ SERVICE

When your LORUS watch requires repair or servicing, please see the enclosed WARRANTY/GUAR-ANTEE.

Printed in China